TOTALINE® WALL THERMOSTATS

Totaline thermostats provide you a complete line of thermostats ready to compete against anyone in the industry. And they're Totaline Tough, Totaline Guaranteed!

The Totaline Thermostat offering will come in 3 unique series to meet your every need:

- Mercury-free
- All-electronic
- Large LCD displays
- Competitively priced
- Compatible with nearly all models
- Commercial and residential thermostats

"ONEforALL"

- TOTALINE Gold series: Our premium line with premium features
- Totaline Signature series: Our complete line of full-feature, value-priced thermostats
- Totaline Star series: Full-featured and priced to compete

RESIDENTIAL STANDARD TOTALINE Gold THERMOSTATS

24 VOLT, NON-PROGRAMMABLE



P563X

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
P274-0100	1H, 1C	Heat/Cool	3-7/8″ x 5-3/4″ x 1-7/16″
P274-0150	1H, 1C	Heat/Cool	
P274-0200	2H, 1C	Heat Pump	
P274-0300	3H, 2C	Multi-stage	

- Separate Setpoints for heat/cool
- Autochangeover, ability to disable autochangeover function
- Large numbers on backlit display
- Fahrenheit/celsius display
- Adjustable clean filter timer
- Built-in logic droopless control
- 5 minute built-in compressor protection
- Outdoor sensor-capable (P274-0200, P274-0300)
- Auxiliary heat indicator (P274-0200, P274-0300), auxiliary heat lockout
- Battery-less operation
- Energize 125 reversing valve with "B" or "O" terminal (P274-0200, P274-0300)
- Thermostat "offset" (calibration) capability
- Separate heat/cool circuits (P274-0150)

*These thermostats require a common wire.

RESIDENTIAL PROGRAMMABLE TOTALINE Gold THERMOSTATS



P563Y

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
P274-1100	1H, 1C	7-Day	Heat/Cool	4-1/4″ x 7-1/2″ x 1-7/16″
P274-1200	2H, 1C	7-Day	Heat Pump	
P274-1300	3H, 2C	7-Day	Multi-stage	

- 7-day programming with 4 independent settings per day
- "Smart" features including self-prompting programming
- Separate Setpoints for heat/cool
- Autochangeover, ability to disable autochangeover function
- Clock is retained for 72 hours during power failure. Program is Neverlost™.
- Large Numbers on backlit display
- Battery-less operation
- Built-in logic for droopless control
- 5 minute built-in compressor protection
- Outdoor sensor-capable)
- Auxiliary heat indicator (P274-1200, P274-1300), auxiliary heat lockout
- Fahrenheit/Celsius Display
- Thermostat "offset" (calibration) capability

*These thermostats require a common wire.

COMMERCIAL PROGRAMMABLE TOTALINE Gold THERMOSTATS

"ONEforALL"

24 VOLT HEAT/COOL

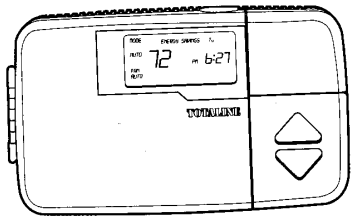

P563Y

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
P274-2100	3H, 2C	7-Day	Multi-Stage	4-1/4″ x 7-1/2″ x 1-7/16″

- 7-day programming with 4 independent settings per day
- Uses commercial language
- "Smart" features including self-prompting programming
- Keypad lockout
- Separate setpoints for heat/cool
- Autochangeover
- Clock is retained for 72 hours during power failure. Program is Neverlost™.
- Large numbers on backlit display
- Fahrenheit/celsius display
- Adjustable Clean filter timer
- Battery-less operation
- Built-in logic for droopless control
- 5 minute built-in compressor protection
- Outdoor sensor capable
- Remote sensor capable
- Auxiliary heat indicator
- Thermostat "offset" (calibration) capability
- Remote sensor "offset" (calibration) capability
- Emergency heat available as a dipswitch
- Optional continuous fan during unoccupied periods
- Hold button can hold indefinitely
- Override button - adjustable 1-6 hours

*These thermostats require a common wire.

TOTALINE® WALL THERMOSTATS

RESIDENTIAL STANDARD *Signature* THERMOSTATS

"ONEforALL"

24 VOLT, NON-PROGRAMMABLE HEAT/COOL

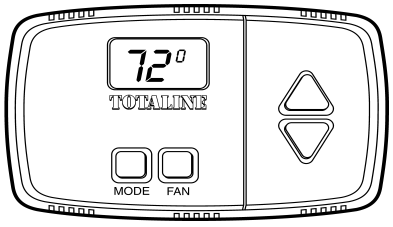

P1040

All Models Provide:

- Slim, low-profile design
- Full range of compatibility
- Fahrenheit/Celsius display
- Electronic anticipator adjustment
- 5 minute compressor protection
- All-electronic easy-to-read display
- Auxiliary heat indicator
- Configurable reversing valve "B" or "O" terminal
- Functionally equivalent to HW T87F and White Rodgers 1F56-444
- Calibration capability

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
P374-0000	1C	Cooling Only	2-3/4″ x 4-1/4″ x 13/16″
P374-0100	1H	Heat Only	
P374-0200	1H, 1C	Heat/Cool	
P374-0300	2H, 1C	Heat Pump	

RESIDENTIAL PROGRAMMABLE *Signature* THERMOSTATS

24 VOLT HEAT/COOL

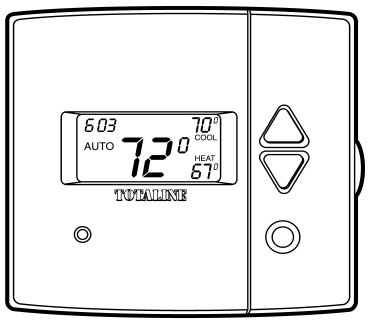

P1044

P/N	STAGES	FUNCTION	PROGRAMMING	DIMENSIONS H x W x D
P374-1000	2H, 1C	H/C or HP	1-day	4.3″ x 4.8″ x 1.1″
P374-1100	2H, 2C	H/C or HP	7-day	
P374-1100EZ	2H, 2C	H/C or HP	7-day	

The P374-1100:

- 7-day programmable with 4 settings per day
- EnergyWatch system for monitoring energy usage
- Second stage of cooling
- Programmable fan with adjustable start and stop times
- Adjustable clean filter timer
- Outdoor sensor capability
- Holiday programming capability

The P374-1100EZ:

- Larger display and program buttons
- Simple wake and sleep time settings

Both Models Provide:

- "Signature" design
- Full range of compatibility (2 Heat/1 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual setpoint with adjustable deadband
- Autochangeover
- Large numbers on backlit display
- Electrically switchable "B" and "O" terminals
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection
- Auxiliary heat indicator
- Fahrenheit/Celsius display
- Neverlost™ settings (not lost during power failure)

TOTALINE® WALL THERMOSTATS

RESIDENTIAL PROGRAMMABLE *Signature* THERMOSTATS "ONEforALL"

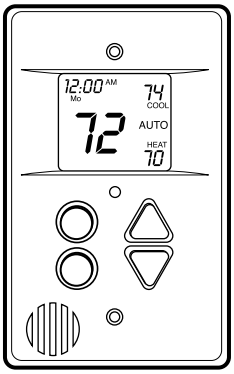

P4341

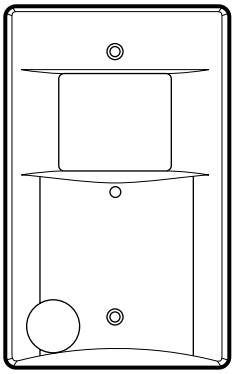

Locking Cover
Available as separate part number
P/N: P374-0600

Thermostat Provides:

- Unique design — mounts flush to the wall
- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual setpoint with adjustable deadband
- Autochangeover
- Large numbers on backlit display
- Electrically switchable "B" and "O" terminals
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection
- Programmable fan with adjustable start and stop times
- Outdoor temperature capable

P/N	STAGES	PROGRAMMING	FUNCTION	DIMENSIONS H x W x D
P374-1000FM	2H, 2C	Non-Prog. or 1- day Prog.	H/C, HP	4.3″ x 2.74″ x .37″
P374-1100FM	2H, 2C	7-Day	H/C, HP	4.3″ x 2.74″ x .37″

TOTALINE® WALL THERMOSTATS

RESIDENTIAL PROGRAMMABLE *Signature* THERMOSTATS "ONEforALL"

24 VOLT HEAT/COOL

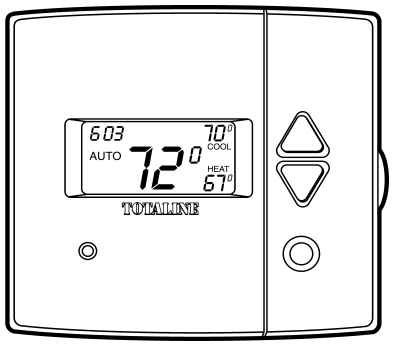

P1044

P/N	STAGES	FUNCTION	PROGRAM-MING	DIMENSIONS H x W x D
P374-1500	3H, 2C	Adv. HP	7-day	4.3″ x 4.3″ x 1.1″
P374-1600	2H, 2C	Temp./Humidity Control	7-day	

Both Models Provide:

- "Signature" design
- Full range of compatibility (for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual setpoint with adjustable deadband
- Autochangeover
- Large numbers on backlit display
- Electrically switchable "B" and "O" terminals
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection
- Auxiliary heat indicator
- Fahrenheit/Celsius display
- Neverlost™ settings (not lost during power failure)
- Programmable fan with adjustable start/stop times

P374-1500 Model Features:

- Adv. HP operation - 3 stage HP with adjustable staging temperatures and time delays
- Adjustable changeover balance point, adjustable times and deadbands between stages
- Outdoor temperature changeover setpoint can be used to lockout 3rd stage heat

P374-1600 Intellistat Model Features:

- Full featured thermostat with built-in humidity control
- Humidity setpoint adjustable for 0 - 60%
- Use with conventional humidifier or Totaline "Intelligent" Humidifier (P/N P110-300)
- Window condensation control (requires Intelligent Humidifier and outdoor sensor)
- Adjustable humidity settings - Low, auto and high allows speed up or slow down of humidification (requires "Intelligent" humidifier)
- Energizes fan on humidity demand if desired
- Requires 6 thermostat wires or 5 wires and add-a-wire accessory (P/N P474-0401)

COMMERCIAL *Signature* THERMOSTATS

"ONEforALL"

24 VOLT HEAT/COOL

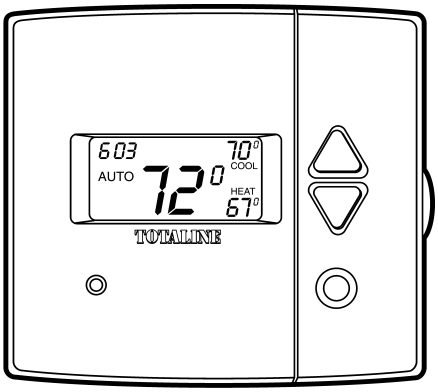

P1044

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
P374-2100	2H, 2C	Non-programmable	H/C, HP	4.3″ x 4.8″ x 1.1″
P374-2200	2H, 2C	7-day	H/C, HP	
P374-2300	2H, 2C	7-day	H/C, HP	
P374-2300-SCH	2H, 2C	7-day	H/C, HP	

All Models Provide:

- "Signature" design
- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual setpoint with adjustable deadband
- Autochangeover
- Large numbers on backlit display
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection
- Adjustable clean filter timer
- Fahrenheit/Celsius display
- Thermostat locking

The P374-2100 Non-Programmable Model Features:

- Configurable dry contact
- Duct sensor capability (read/control)
- Soft-start capability — sequential starting of multiple units
- Programmable with external time clock
- Remote sensor capable

The P374-2200 Programmable Model Features:

- 7-day programmable
- 4 settings per day
- 3 security levels of thermostat locking
- 4-hour override
- Holiday programming
- Energy-saving Smart Fan
- Clock retained for 48 hours during power failure. Program is Neverlost™.

The P374-2300 "All-In-One" Model:

- All features from P374-2100 and P374-2200 (configurable dry contact and programmability)
- Pre-occupancy purge
- Economizer

The P374-2300-SCH:

- Adjustable unoccupied override timer
- Soft start for up to 100 units
- Morning warm up feature
- Programmable for school (or other institutional) use

TOTALINE® WALL THERMOSTATS

COMMERCIAL PROGRAMMABLE LIGHT-ACTIVATED *Signature* THERMOSTATS

"ONEforALL"

24 VOLT HEAT/COOL

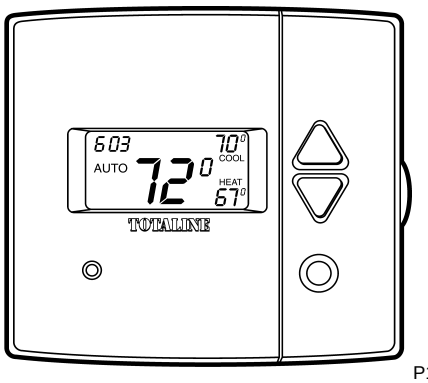

P1044

These models provide the same functionality and features as the P374-2200 and P374-2300 models, with the additional capability of light activation. The light sensor (with separate sensitivity adjustment) forces the thermostat into Occupied Mode when overhead lights are on.

P/N	STAGES	PROGRAMM-ING	DIMENSIONS H x W x D
P374-2200LA	2H, 2C	Standard Commercial	4.3″ x 4.8″ x 1.1″
P374-2300LA	2H, 2C	Hi-end Commercial	

For accessories see below.

COMMERCIAL PROGRAMMABLE *Signature* THERMOSTATS

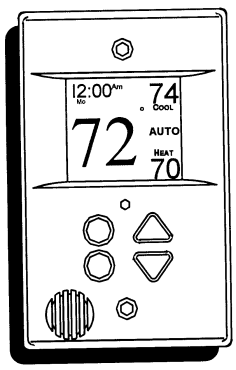

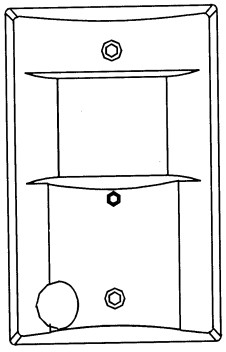

P2126

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
P374-2200FM	2H, 2C	7-Day	H/C, HP	4.3″ x 2.74″ x .37″
P374-2300FM	2H, 2C	7-Day	H/C, HP	

All Models Provide:

- Unique design — mounts flush to the wall
- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- 7-day programmable with 4 settings per day
- Dual setpoint with adjustable deadband
- Autochangeover
- Large numbers on backlit display
- Electrically switchable “B” and “O” terminals
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- Energy saving smart fan
- 5 minute built-in compressor protection

The P374-2300 FM Programmable Model Adds:

- Remote sensor capable
- Dry contact equipped
- Post purge fan
- Soft start capability - sequential starting of multiple units

RESIDENTIAL AND COMMERCIAL STANDARD Star THERMOSTATS

"ONEforALL"

24 VOLT STANDARD ELECTRONIC THERMOSTATS

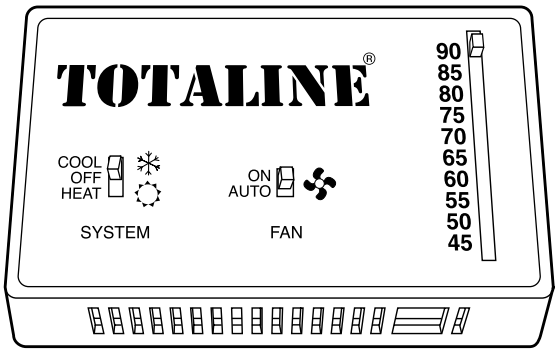

P4266

P474-0002 and 0003 Models Provide:

- One part plastic case with easy access to screw terminals
- Will accommodate 18 AWG thermostat wire

P/N	STAGES		DIMENSIONS
	Heat/Cool	Heat Pump	
P474-0002	1H, 1C	—	Standard
P474-0003	—	1H, 1C	Standard

24 VOLT, NON-PROGRAMMABLE HEAT/COOL

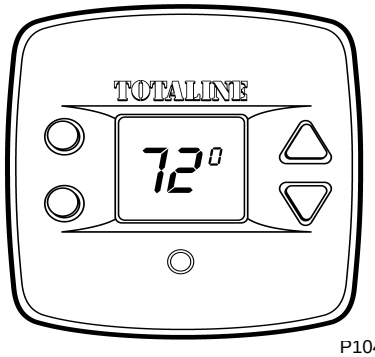

P1041

P474-0100 Model Provides:

- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Fahrenheit/Celsius display
- All-electronic easy-to-read display
- Battery-less operation
- 5 minute built-in compressor protection
- Reversing valve actuated on either “B” or “O” terminals
- Keypad lockout
- Backlit display

P474-0220 Model Provides:

- Digital, continuously backlit thermostats, replaces 2 wire mechanical stats
- Only 2 wires needed to power thermostat and no batteries required
- Heat only or cool only, selectable in setup
- Thermostat locking
- Display shows setpoints and room temperatures simultaneously
- 5 minute built-in compressor protection

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
P474-0100	2H, 2C	HC/HP	3.14″ x 3/14″ x 1.33″
P474-0220	1H or 1C	HC/HP	

TOTALINE® WALL THERMOSTATS

RESIDENTIAL PROGRAMMABLE Star THERMOSTATS

"ONEforALL"

24 VOLT HEAT/COOL



P1041

P/N: P474-1010



P4375

P/N: P474-1050, P474-1020

P/N	STAGES	FUNCTION	PROGRAMM-ING	DIMENSIONS H x W x D
P474-1010	2H, 2C	H/C, HP	1-day	3.14″ x 3.14″ x 1.33″
P474-1050	2H, 2C	H/C, HP	5 -2 day	3.14″ x 3.14″ x .97″
P474-1020	1H or 1C	H/C, HP	7-day	

P474-1010 and 1050 Models Provide:

- New "Star" design
- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual setpoint with adjustable deadband
- Autochangeover
- Programmable with up to 4 time periods per day
- Large numbers on backlit display
- Electronically switchable "B" and "O" terminals
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection and adjustable cycle limit with overrides for servicing equipment
- Fahrenheit/Celsius display
- Neverlost™ settings (not lost during power failure)
- Keypad lockout
- Configurable display capable of single or dual setpoint operation
- Backplate available for replacement applications
- Backlit display

P474-1050:

- Programming up to 4 periods per day, separate weekday and weekend programs

P474-1020 Model Provides:

- New "Star" design
- Programmable, digital, continuously backlit 2-wire thermostat
- Only 2 wires needed to power thermostats, no batteries required
- Heat only-or-cool only, selectable in setup
- Thermostat locking
- Display shows setpoint and room temperature simultaneously
- 5 minute compressor protection
- Outdoor sensor capable

RESIDENTIAL BATTERY Star THERMOSTATS

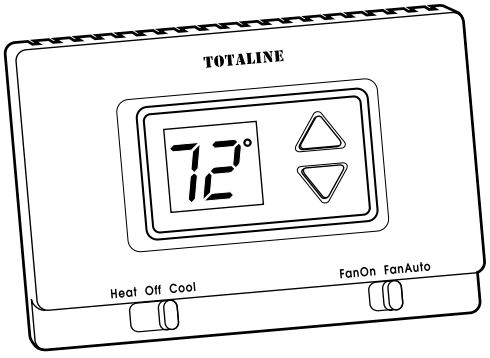

P4416

P/N	STAGES		DESCRIPTION
	Heat/Cool	Heat Pump	
P474-0130	1H, 1C	1H, 1C	Non-Programmable
P474-1035	1H, 1C	1H, 1C	5+2 Day Programmable

P474-0130 Standard Model:

- Battery operated 2, 3, and 4 wire applicable
- Large LCD Display
  - — Room temperature display
  - — Set temperature displayed on button press
- Easy to operate with Heat/Off/Cool and Fan On/Fan Auto switches
- Compatible with Heat Pump, Gas/Electric, 24 VAC, DC and Millivolt systems

P474-1035 5+2 Day Programmable Model Provides:

- Battery operated and/or system powered. Works with 2, 3, 4 and 5 wire systems. Battery runs thermostat in case of power failure
- Weekday/weekend program for comfort and energy savings
- Large, backlit LCD display
- Bi-color LED Heat/Cool indicator
- Non-volatile memory
- Separate Heat/Cool set points
- Easy to operate with Heat/Off/Cool and Fan On/Fan Auto switches
- Easy to program with 3 position program switch — Run/Set/Off
- Heat Pump compatible. Works with DC and Millivolt systems when battery powered

TOTALINE® WALL THERMOSTATS

RESIDENTIAL PROGRAMMABLE WIRELESS Star THERMOSTATS

24 VOLTS

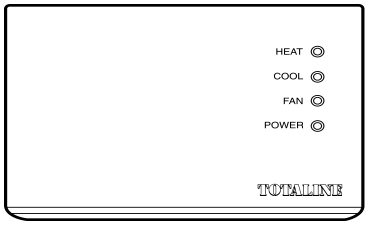

P1042



P1043

P/N	STAGES	FUNCTION	DESCRIP-TION	DIMENSIONS H x W x D
P474-1100RF	2H, 2C	H/C, HP	Thermostat/ Transmitter	4-3/4″ x 3-1/4″ x 1-1/4″
P474-1100REC	—	—	Receiver	3-1/4″ x 4-3/4″ x 1-1/4″

This unique model is capable of wireless communication. Both receiver and thermostat are paired to allow communication. However, each receiver is capable of "listening" to/from 1 to 4 thermostats/transmitters. In addition, each thermostat is capable of transmitting to multiple receivers.

*Requires two AA lithium batteries.

- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual setpoint with adjustable deadband
- Autochangover
- Large numbers on backlit display
- Electrically switchable "B" and "O" terminals
- Transmission indicator
- 5 minute built-in compressor protection
- Fahrenheit/Celsius display
- Neverlost™ settings (not lost during power failure)
- 7-day programmable with 4 settings per day
- Programmable fan with adjustable start and stop times.

COMMERCIAL STANDARD/PROGRAMMABLE Star THERMOSTATS

"ONEforALL"

24 VOLT HEAT/COOL/HP



Commercial1

Thermostat



Commercial

Thermostat with Locking Cover

P4342

P/N	STAGES	FUNCTION	PROGRAMM-ING	DIMENSIONS H x W x D
P474-2050	2H, 2C	H/C,HP	Non-Programmable	3.14″ x 3.14″ x .97″
P474-2150	2H, 2C	H/C, HP	5-1-1 day	

Both Models Provide:

- New "Star" design
- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual Setpoint with adjustable deadband
- Autochangeover
- Large numbers on backlit display
- Bi-color LED, red for heating, green for cooling
- Battery-less operation
- 5 minute built-in compressor protection
- Fahrenheit/Celsius display
- Keypad lockout
- Backlit display

The P474-2050:

- International heating/cooling symbols
- Non-programmable
- Locking cover included. Cover is secure and tamperproof

The P474-2150:

- Programmable with up to 4 time periods per day, separate weekday, Saturday and Sunday schedules
- Locking cover included. Cover is secure and tamperproof.
- 4 hour setback override timer
- Energy -saving Smart Fan
- Configurable display capable of single or dual setpoint operation

COMMERCIAL PROGRAMMABLE WIRELESS Star THERMOSTATS

"ONEforALL"

24 VOLTS



P1042



P1043

P/N	STAGES	DESCRIPTION	FUNCTION	PROGRAMMING	DIMENSIONS H x W x D
P474-2300RF	2H, 2C	Thermostat/ Transmitter	H/C, HP	7-day	4-3/4″ x 3-1/4″ x 1-1/4″
P474-2300REC	—	Receiver	—	—	3-1/4″ x 4-3/4″ x 1-1/4″

This unique model is capable of wireless communication. Both receiver and thermostat are paired to allow communication. However, each receiver is capable of "listening" to/from 1 to 4 thermostats/transmitters. In addition, each thermostat is capable of transmitting to multiple receivers.

*Requires two AA lithium batteries.

- Full range of compatibility (2 Heat/2 Cool stages for use on gas/electrics, heat pumps, electric and hydronic heat)
- Dual setpoint with adjustable deadband
- Autochangeover
- Large numbers on backlit display
- 5 minute built-in compressor protection
- Fahrenheit/Celsius display
- Thermostat locking
- Soft-start capability — sequential starting of multiple units
- Dry contact on receiver
- 7-day programmable
- 4 settings per day
- 3 security levels of thermostat locking
- 4-hour override
- Energy-saving Smart Fan
- Program is never lost during battery change
- "Battery Low" display on screen when battery needs to be changed

TOTALINE® WALL THERMOSTAT ACCESSORIES

ACCESSORIES FOR TOTALINE Gold THERMOSTATS

"ONEforALL"

P/N	DESCRIPTION	FOR USE WITH
P274-0400	Outdoor Sensor	P274-0200, 0300, 1100, 1200, 1300, 2100
P274-0401	Remote Sensor	P274-2100
P274-0410	5 to 4 Wire Converter	All "Gold" thermostats
P274-0420	Wall Plate (small)	P274-0100, 0200, 0300
P274-0421	Wall Plate (large)	All "Gold" thermostats

P374-0620

Locking Cover for Signature



ACCESSORIES FOR Signature THERMOSTATS

P/N	DESCRIPTION	FOR USE WITH
P374-0420	Wall Plate for Non-programmable (small)	P374-0000, 0100, 0200, 0300
P374-0440	Door for Programmable	P374-1000, 1100, 1500, 1600, 2100, 2200, 2300, 2200LA, 2300LA
P374-0600	Locking Cover for Flushmount	P374-1000FM, 1100FM, 2200FM, 2300FM
P374-0610	Stainless Steel Locking Cover for Flushmount	P374-1000FM, 1100FM, 2200FM, 2300FM
P374-0620	Locking Cover for Signature	P374-2100, P374-2200, P374-2300
P474-0400	Outdoor Sensor	P374-1000FM*, 1100*, 1100FM*, 1500*, 1600*, 2100†, 2300††, 2300LA††, 2300FM†
P474-0401	Remote Sensor w/Button	P374-1000FM*, 1100*, 1100FM*,1500*, 1600*, 2100†, 2300††, 2300LA††, 2300FM†
P474-0401LA	Light Activated Remote Sensor w/Button	P374-1000FM*, 1100*, 1100FM*, 1500*, 2100†, 2300††, 2300FM†
P474-0401RF	Wireless Remote Sensor w/Button Transmitter	P374-1000FM*, P-374-1100*, 1100FM*, 1500*, 1600*, 2100†, 2300††, 2300LA††, 2300FM†
P474-0401REC	Wireless Remote Receiver	P374-1000FM*, P374-1100*, 1100FM*, 1500*, 1600*, 2100†, 2300††, 2300LA††, 2300FM†
P474-0410	Add-A-Wire	All thermostats
P474-0430	Duct Sensor	P374-1000FM*, P374-1100*, 1100FM*, 1500*, 1600*, 2100†, 2300††, 2300LA††, 2300FM†
P474-0500	Resistor for Power-sharing	All Programmable thermostats
P474-0900	Opto-Isolator for Thermostats	P374-2100, P374-2300

ACCESSORIES FOR Star THERMOSTATS

P/N	DESCRIPTION	FOR USE WITH
P474-0410	Add-A-Wire	All thermostats
P474-0421	Wall Plate	P474-0100,0220, 1010, 1020, 1050, 2050, 2150
P474-0421-L	Large Wall Plate Cover	P474-0100, 0220, 1010, 1020, 1050, 2050, 2150
P474-0421-S	Small Backplate w/"J" Box Adapter	P474-0100, 1050
P474-0500	Resistor for Power-sharing	All Programmable Thermostats
P474-0600	Locking Cover	P474-1020, 1050, 2050, 2150
P474-0800	Adapter Battery Pack for Wireless Transmitter	P474-1100RF, 2300RF
P474-0900	Opto-Isolator For Thermostats	P474-2300RF

*Will read temperature, does not control temperature.
†Option to read temperature or control temperature.
††Will control temperature.

CUSTOMIZED THERMOSTAT LOGO PROGRAM®

CUSTOMIZED THERMOSTAT PROGRAM FOR TOTALINE, CARRIER, AND BRYANT THERMOSTATS

This program customizes your Totaline, Carrier or Bryant thermostat with Dealer Name, Company Logo, and Phone Number on it.

This effective selling strategy promotes the dealer's company to homeowners and visitors — offering a great opportunity for future business as well as providing a wonderful customer service benefit!

- Designed specifically for the Dealer.
- High Quality Silk Screened Logo.
- Available in ONE, TWO, or THREE Color.
- Minimum Quantity of 50 thermostats per order.

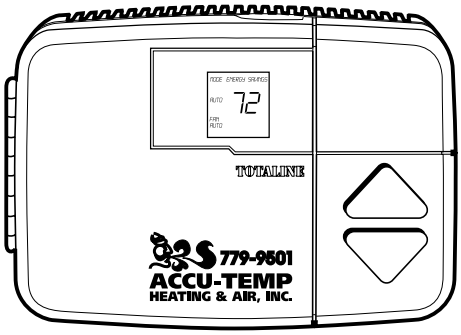

The Thermostat Door Program

- Print the Dealer's Logo on just the door!

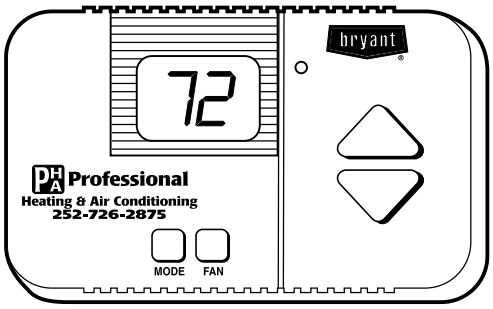

The Inside Face Option

- Print the Dealer's Logo on the Inside Face of the Thermostat and Just Shut the door!
- No Visible Side Effects, but with all the Benefits!

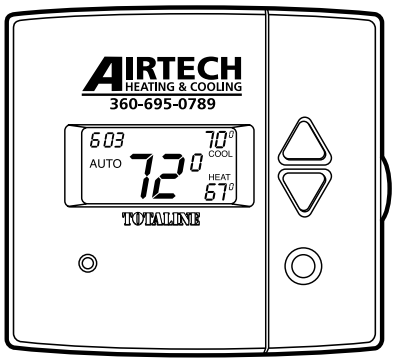

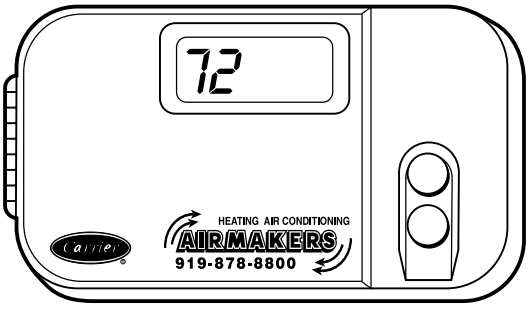

STATart

Honeywell Model	Electronic or Mechanical	Type (SS, HP or MS)+	Program-ming	Stages (maximum)	Change-over	Totaline * "Gold"	Totaline ** Signature"	Totaline ** "Star"
´822D	Mechanical	SS	No	1H		P274-0100	P374-0100	P474-0220
´834C	Mechanical	SS	No	1H or 1C		P274-0100	P374-0200	P474-0100
´8034C	Mechanical	SS	No	1H or 1C		P274-0100	P374-0200	P474-0100
´87F	Mechanical	SS	No	1H or 1C		P274-0100	P374-0200	P474-0100
´87F + Q539	Mechanical	SS	No	1H / 1C	Manual	P274-0100	P374-0200	P474-0100
´8224A-1019	Mechanical	SS	1-day	1H / 1C	Manual	P274-1100	P374-1000	P474-1010
´594R	Mechanical	HP	No	2H / 1C	Manual	P274-0200	P374-0300	P474-0100
´594G	Mechanical	HP	No	2H / 1C	Manual	P274-0200	P374-0300	P474-0100
´874D + Q674	Mechanical	MS	No	2H / 2C	Manual	P274-0300	P374-1100, FM	P474-0100
´8400C, T8401C	Electronic	SS	No	1H / 1C	Manual	P274-0100	P374-0200	P474-0100
´8500D, T8501D, T8502D	Electronic	SS	No	1H / 1C	Auto	P274-0100	P374-1000	P474-0100
´8600D, T8601D, T8602D	Electronic	SS	7 day	1H / 1C	Auto	P274-1100	P374-1100, FM	P474-1050^
´8700C	Electronic	SS	1-day	1H / 1C	Manual	P274-1100	P374-1000	P474-1000
´8411R	Electronic	HP	No	2H / 1C	Manual	P274-0200	P374-0300	P474-0100
´8511G	Electronic	HP	No	2H / 1C	Auto	P274-0200	P374-1000	P474-0100
´8611G	Electronic	HP	7 day	2H / 1C	Auto	P274-0200	P374-1100, FM	P474-1050^
´8621C	Electronic	MS	7 day	2H / 1C	Auto	P274-1300	P374-1100, FM	P474-1050^
´8624D	Electronic	MS	7 day	2H / 2C	Auto	P274-1300	P374-1100, FM	P474-1050^
´7100D/Q7100A	Electronic	MS	No	2H / 2C	Auto	P274-2100	P374-2100	P474-2050
´7300D/Q7300A	Electronic	MS	7 day	2H / 2C	Auto	P274-2100	P374-2300, FM, LA	P474-1050^
´7300E/Q7300C	Electronic	HP	7 day	3H / 2C	Auto	P274-2100	P374-1500	N/A
White Rodgers Model								
C20	Mechanical	SS	No	1H		P274-0100	P374-0100	P474-0220
F30	Mechanical	SS	No	1H		P274-0100	P374-0100	P474-0220
E36/1F36	Mechanical	SS	No	1H or 1C		P274-0100	P374-0200	P474-0100
E56/1F56	Mechanical	SS	No	1H / 1C	Manual	P274-0100	P374-0200	P474-0100
F72	Mechanical	SS	1 day	1H or 1C		P274-1100	P374-1000	P474-1010
F72 + S25	Mechanical	SS	1 day	1H / 1C	Manual	P274-1100	P374-1000	P474-1010
F58-058	Mechanical	HP	No	2H / 1C	Manual	P274-0200	P374-0300	P474-0100
C70-24	Mechanical	HP	No	2H / 2C	Manual	P274-0200	P374-0300	P474-0100
C70-51	Mechanical	MS	No	2H / 1C	Manual	P274-0300	P374-1000	P474-0100
F86-54	Electronic	SS	No	1H / 1C	Manual	P274-0100	P374-0200	P474-0100
F80-24	Electronic	SS	1 day	1H / 1C	Manual	P274-1100	P374-1000	P474-1010
F80-51	Electronic	SS	5+2 day	1H / 1C	Manual	P274-1100	P374-1100	P474-1050
F90-71	Electronic	SS	5+2 day	1H / 1C	Auto	P274-1100	P374-1100	P474-1050
F97-71	Electronic	SS	7 day	1H / 1C	Auto	P274-1100	P374-1100	P474-1050^
F89-51	Electronic	HP	No	2H / 1C	Manual	P274-0200	P374-0300	P474-0100
F59-11	Electronic	HP	No	2H / 1C	Manual	P274-0200	P374-0300	P474-0100
F92-71	Electronic	HP	5+2 day	3H/2C	Auto	P274-1200	P374-1500	P474-1050
F94-71	Electronic	HP	7 day	3H/2C	Auto	P274-1200	P374-1500	N/A
F95-71	Electronic	MS	7 day	3H/2C	Auto	P274-1300	P374-1500	N/A

Totaline Gold thermostats require a 5-->4 wire converter (P274-0410) for 4 wire applications (power stealing and battery)

· SS (Single Stage), HP (Heat Pump), MS (Multi-stage)

· 5+2 Day Programming

Residential or COMM'L	SS, HP or MS	Program-mable?	# Days	Change-over	Application	"Gold"	"Signature"	"Star"
RESIDENTIAL	Single Stage	Non-Prog		Manual	1H		P374-0100	P474-0220
					1C		P374-0000	P474-0220
				Manual	1H and 1C		P374-0200	
				Auto	1H and 1C	P274-0100		P474-0100
			1-day	Auto	1H and 1C		P374-1000	P474-1010
			7-day	Manual	1H or 1C			P474-1020
		Programmable	5+2-day	Auto	1H and 1C			P474-1050
			7-day	Auto	1H and 1C	P274-1100	P374-1100	P474-1100
		Programmable, Flushmount	7-day	Auto	1H and 1C		P374-1100FM	
		Programmable, Wireless	7-day	Auto	1H and 1C			P474-1100RF
	Heat Pump	Non-Prog		Manual	2H and 1C		P374-0300	
				Auto	2H and 1C	P274-0200		P474-0100
		Programmable	1-day	Auto	2H and 1C		P374-1000	P474-1010
			5+2-day	Auto	2H and 2C			P474-1050
			7-day	Auto	2H and 1C	P274-1200	P374-1100	
		Programmable, Flushmount	7-day	Auto	2H and 2C		P374-1100FM	
		Programmable, Wireless	7-day	Auto	2H and 2C			P474-1100RF
		Non-Prog		Auto	2H and 2C			P474-0100
					3H and 2C	P274-0300		
		Programmable	5+2-day	Auto	2H and 2C			P474-1050
	Multi-stage	Programmable	7-day	Auto	2H and 2C		P374-1100	P474-1100
					3H and 2C	P274-1300		
		Programmable, Flushmount	7-day	Auto	2H and 2C		P374-1100FM	
		Programmable, Wireless	7-day	Auto	2H and 2C			P474-1100RF
					2H and 2C		P374-1500	
	Adv. HP/DF	Programmable	7-day	Auto				
		Dual Fuel			3H and 2C		P374-1500	
	Intellistat	Programmable	7-day	Auto	2H and 2C		P374-1600	
		Humidity and Temperature Control						
		Non-Prog		Auto	2H and 2C		P374-2100	P474-2050
		Programmable	5+2-day	Auto	2H and 2C			P474-2150
					2H and 2C	P274-2100	P374-2200	
		Programmable	7-day	Auto			P374-2300	
COMMERCIAL					3H and 2C	P274-2100		
		Programmable, Flushmount	7-day	Auto	2H and 2C		P374-2200FM	
							P374-2300FM	
		Programmable, Wireless	7-day	Auto	2H and 2C			P474-2300RF
		Programmable, Light-Activated	7-day	Auto	2H and 2C		P374-2200LA	
							P374-2300LA	

Signature

Flush-Mount

Type	P/N	Stages Heat, Cool/Heat Pump	Description	Bi-Color LED for Heating/ Cooling	Override Program Feature	Never Lost Programming	Holiday/Vacation Program'g	Clock Backup	Security	Back Light Display	Outdoor Temp. Sensor Capability*	Remote Sensing Capability*
Residential	**P374-1000FM**	2H, IC / 2H, IC	1 Day Prog. or Standard	Yes	—	Yes	Yes	—	Key Pad Lock	Continuous	Yes	—
Residential	**P374-1100FM**	2H, 2C / 2H, 2C	7-Day Prog.	Yes	—	Yes	Yes	—	Key Pad Lock	Continuous	Yes	—
Commercial	**P374-2200FM**	2H, 2C / 2H, 2C	7-Day Prog.	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	—	—
Commercial	**P374-2300FM**	2H, 2C / 2H, 2C	7-Day Prog. Deluxe	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	Yes	Yes

*See Totaline Thermostats Accessories For Part Numbers.

Signature

Type	Style	P/N	Stages Heat, Cool/Heat Pump	Description	Aux. Heat Indicator	LED for Heating/ Cooling	Bi-Color Override Program Feature	Never Lost Programming	Holiday/ Vacation Program'g	Clock Backup	Security	Back Light Display	Outdoor Remote Sensing Capability*	Temp. Sensor Capability*
Residential	A	**P374-0000**	IC	Standard	—	—	—	—	—	—	—	—	—	—
Residential	A	**P374-0100**	IH	Standard	—	—	—	—	—	—	—	—	—	—
Residential	A	**P374-0200**	IH, IC / NA	Standard	—	—	—	—	—	—	—	—	—	—
Residential	A	**P374-0300**	NA / 2H, IC	Standard	Yes	—	—	—	—	—	—	—	—	—
Residential	B	**P374-1000**	2H, IC / 2H, IC	1-Day Prog.	—	Yes	—	Yes	—	—	Key Pad Lockout	Continuous	—	—
Residential	B	**P374-1100**	2H, 2C / 2H, 2C	7-Day Prog.	—	Yes	—	Yes	Yes	—	Key Pad Lockout	Continuous	Yes	—
Residential	B	**P374-1100EZ**	2H, 2C / 2H, 2C	1-Day Prog.	—	Yes	—	Yes	—	—	Key Pad Lockout	Continuous	Yes	—
Residential	B	**P374-1500**	2H, 2C / 3H, 2C	7-Day Prog. Adv. HP / Dual Fuel	—	Yes	—	Yes	Yes	—	Key Pad Lockout	Continuous	Yes	—
Residential	B	**P374-1600**	2H, 2C / 2H, 2C	7-Day Prog. "Intellistat" Temp. & Humidity Control	—	Yes	—	Yes	Yes	—	Key Pad Lockout	Continuous	Yes	—
Commercial	B	**P374-2100**	2H, 2C / 2H, 2C	Standard	—	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	—	Yes
Commercial	B	**P374-2200**	2H, 2C / 2H, 2C	7-Day Prog.	—	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	—	—
Commercial	B	**P374-2300**	2H, 2C / 2H, 2C	7-Day Prog. Deluxe	—	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	Yes	Yes
Commercial	B	**P374-2300-SCH**	2H, 2C / 2H, 2C	7-Day Prog. Deluxe	—	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	Yes	Yes
Commercial	B	**P374-2200LA**	2H, 2C / 2H, 2C	7-Day Prog. Light Activated	—	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	—	—
Commercial	B	**P374-2300LA**	2H, 2C / 2H, 2C	7-Day Prog. Light Activated	—	Yes	Yes	Yes	Yes	48 Hrs	3 Level up to Setpoint Lock	Continuous	—	Yes

*See Totaline Thermostats Accessories for Part Numbers.

TOTALINE Gold

Type	Style	P/N	Stages Heat, Cool/Heat Pump	Description	Aux. Heat Indicator	Override Program Feature	Never Lost Programming	Clock Backup	Security	Back Light Display	Outdoor Temp. Sensor Capability*	Remote Sensing Capability*
Residential	A	**P274-0100**	IH, IC / NA	Standard	—	—	—	—	—	On Button Push	—	—
Residential	A	**P274-0200**	2H, IC / 2H, IC	Standard	Yes	—	—	—	—	On Button Push	Yes	—
Residential	A	**P274-0300**	2H, 2C / 3H, 2C	Standard	Yes	—	—	—	—	On Button Push	Yes	—
Residential	B	**P274-1100**	IH, IC / NA	7-Day Prog.	—	—	Yes	72 Hours	—	On Button Push	Yes	—
Residential	B	**P274-1200**	2H, IC / 2H, IC	7-Day Prog.	Yes	—	Yes	72 Hours	—	On Button Push	Yes	—
Residential	B	**P274-1300**	2H, 2C / 3H, 2C	7-Day Prog.	Yes	—	Yes	72 Hours	—	On Button Push	Yes	—
Commercial	B	**P274-2100**	2H, 2C / 3H, 2C	7-Day Prog.	Yes	Yes	Yes	72 Hours	Key Pad Lock	On Button Push	Yes	Yes

*See Totaline Thermostats Accessories For Part Numbers

Star

Type	Style	P/N	Stages Heat, Cool/Heat Pump	Description	Bi-Color LED for Heating/Cooling	Never Lost Programming	Security	Back Light Display	Outdoor Temp. Sensor Capability*
Residential	A	**P474-0100**	2H, 2C / 2H, 2C	Standard	Yes	—	Key Pad Lock	Continuous	—
Residential	A	**P474-0220**	IH or IC	Standard 2 Wire	Yes	—	Key Pad Lock	Continuous	Yes
Residential	A	**P474-1010**	2H, 2C / 2H, 2C	1-Day Prog.	Yes	Yes	Key Pad Lock	Continuous	—
Residential	B	**P474-1050**	2H, 2C / 2H, 2C	5+2 Day Prog.	Yes	Yes	Key Pad Lock	Continuous	—
Commercial	B	**P474-2050**	2H, 2C / 2H, 2C	Standard	Yes	—	Locking Cover	Continuous	—
Commercial	B	**P474-2150**	2H, 2C / 2H, 2C	5+1+1 Prog.	Yes	Yes	Locking Cover	Continuous	—

*See Totaline Thermostats Accessories for Part Numbers

Star

The Wireless Thermostat

Type	P/N	Stages Heat, Cool/Heat Pump	Description	Bi-Color LED for Heating/ Cooling	Override Program Feature	Never Lost Programming	Holiday/ Vacation Program'g	Clock Backup	Security	Back Light Display	Receiver Part Number
Residential	**P474-1100RF**	2H, 2C / 2H, 2C	7 Day Prog.	Yes	—	Yes	Yes	—	Key Pad Lock	On Button Push	P474-1100REC
Commercial	**P474-2300RF**	2H, 2C / 2H, 2C	7-Day Prog.	Yes	Yes	Yes	Yes	48 Hrs	3 Levels up to Setpoint Lock	On Button Push	P474-2300REC

*See Totaline Thermostats Accessories for Part Numbers

RESIDENTIAL STANDARD CARRIER THERMOSTATS - “Builders Stat”

24 VOLT, NON-PROGRAMMABLE

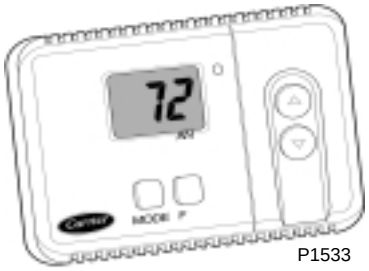

P1533

- Slim, low-profile design
- Fahrenheit/Celsius display
- Electronic anticipator adjustment
- 5 minute compressor protection
- All-electronic easy-to-read display
- Auxiliary heat indicator
- Configurable reversing valve “B” or “O” terminal
- Calibration capability

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
TSTATCCBAC01	1H, 1C	Heat/Cool	2-3/4″ x 4-1/4″ x 13/16″
TSTATCCBHP01	2H, 1C	Heat Pump	

RESIDENTIAL STANDARD CARRIER THERMOSTATS

24 VOLT, NON-PROGRAMMABLE

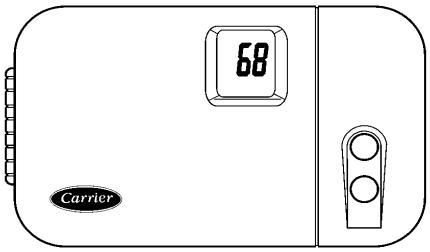

P1534

- Separate setpoints for heat/cool.
- Autochangover
- Large numbers on backlit display
- Fahrenheit/Celsius display
- Adjustable clean filter time
- 5 minute built-in compressor protection
- Calibration capability
- Ability to disable Autochangover
- Auxiliary heat lockout
- Auxiliary heat indicator (TSTATCCNHP01-B, TSTATCCN2S01-B)
- Outdoor sensor capability (TSTATCCNHP01-B, TSTATCCN2S01-B)
- Outdoor sensor capable (TSTATCCNHP01-B, TSTATCCN2S01-B)
- Battery-less operation
- Energize reversing valve “B” or “O” terminal

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
TSTATCCNAC01-B*	1H, 1C	Heat/Cool	3-7/8″ X 5-3/4″ X 1-7/16″
TSTATCCNHP01-B*	2H, 1C	Heat Pump	
TSTATCCN2S01-B*	3H, 2C	Multi-stage	

*These thermostats require a common wire.

RESIDENTIAL PROGRAMMABLE CARRIER THERMOSTATS

24 VOLT

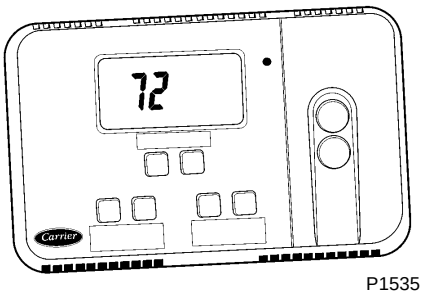

P1535

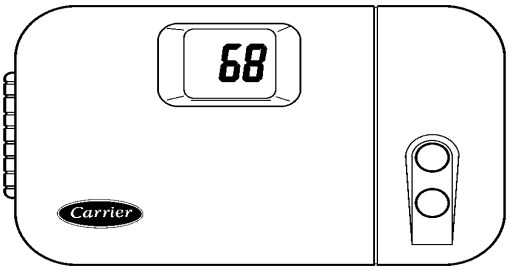

P1536

Thermostat Provides:

- 4 independent settings per day
- Self prompting programming
- Separate setpoints for heat/cool
- Program is NeverLost™
- Battery-less operation
- 5 minute built-in compressor protection
- Offset capability (calibration)
- Auxiliary heat lockout

7 Day Adds:

- Auxiliary heat indicator (TSTATCCPHP01-B, TSTATCCP2S01-B)
- Autochangover
- Outdoor temperature
- Auxiliary heat lockout
- Backlighting
- Clock is retained for 72 hours during power failure.
- Ability to disable Autochangover

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
TSTATCCSAC01	1H, 1C	5-2 Day	Heat/Cool	3-1/2″ x 5-1/2″ x 3/4″
TSTATCCSHP01	2H, 1C		Heat Pump	
TSTATCCPAC01-B*	1H, 1C	7-day	Heat/Cool	4-1/4″ x 7-1/2″ x 1-7/16″
TSTATCCPHP01-B*	2H, 1C		Heat Pump	
TSTATCCP2S01-B*	3H, 2C		Multi-stage	

*These thermostats require a common wire.

RESIDENTIAL PROGRAMMABLE CARRIER THERMOSTATS

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
TSTATCCPDF01-B*	3H, 2C	7- Day	Dual Fuel	4-1/4″ x 7-1/2″ x 1-7/16″
TSTATCCPRH01-B*	2H, 2C		Thermidistat	

*These thermostats require a common wire.

CARRIER WALL THERMOSTATS

COMMERCIAL PROGRAMMABLE CARRIER THERMOSTATS

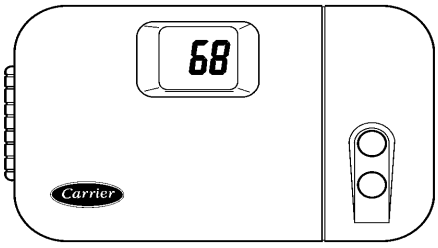

P1536

P/N	STAGES	FUNCTION	PROGRAMM-ING	DIMENSIONS H x W x D
33CSPTN-02*	3H, 2C	Multi-stage	7-day	4-1/4″ x 7-1/2″ x 1-7/16″

*These thermostats require a common wire.

- 4 independent settings per day
- Commercial language
- Self prompting programming
- Keypad lockout
- Separate setpoints for heat/cool
- Autochangeover
- Clock is retained for 72 hours during power failure. Program is never lost.
- Fahrenheit/Celsius display
- Adjustable clean filter timer
- Battery-less operation
- 5 minute built-in compressor protection
- Outdoor sensor compatible
- Remote sensor capable
- Auxiliary heat indicator
- Thermostat “offset” (calibration) capability
- Remote Sensor “Offset” (calibration) capability
- Emergency heat available as a dipswitch
- Optional continuous fan during unoccupied periods
- Hold button can hold indefinitely
- Override button - adjustable 1-6 hours

COMMERCIAL PROGRAMMABLE CARRIER THERMOSTATS

HOTEL THERMOSTATS

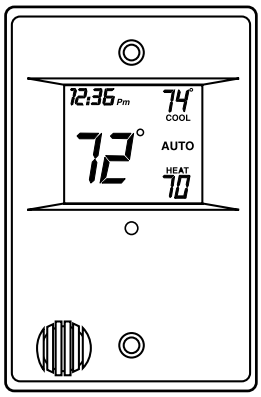

P4273

P/N	STAGES	FUNCTION	PROGRAMMING	DIMENSIONS H x W x D
33CS051-FS*	2H, 2C	Multi-stage	1-day	4-1/4″ x 2-3/4″ x 1-3/8″
33CS051-FS				

- 24 VAC, Auto Changeover, 2 Stage Heat/2 Stage Cool* for use with gas/electrics, heat pumps, electric and hydronic heat
- Multi-Speed Fan ready — controls up to 3 fan speeds*
- Perfect for hotel applications
- Configurable display shows as little or as much information as your want it to show
- Dual set point OR single set point with adjustable deadband, set point adjustment range from 35° to 99° F
- Fahrenheit or Celsius display
- Programmable with up to 4 time periods per day
- Thermostat Locking — Set points can only be adjusted by authorized individuals if this feature is turned on
- Many security features including ‘hidden’ set point limiting
- Energy saving smart fan
- Advanced dry contact with latching capability for use with light sensor, door sensor, or motion sensor
- Thermoglow Continuously Lit Electro-luminous Display
- Maintains temperature to within 1° of set point
- All programming and set points stored in non-volatile memory, and are never lost in power failure.
- Minimum 48 hour clock backup
- Attractive ultra-white design
- Includes mounting bracket for easy drywall installation
- Red/Green LED shows whether thermostat is calling for heating or cooling
- 5 minute compressor time guard and adjustable cycle limit, both overrideable for servicing equipment

*Thermostat is capable of 5 outputs and can be configured many different ways (i.e., 3 fan speeds, 2 stage heat, 1 stage cool, etc.)

BRYANT WALL THERMOSTATS

RESIDENTIAL STANDARD BRYANT THERMOSTATS - “Builders Stat”

24 VOLT, NON-PROGRAMMABLE

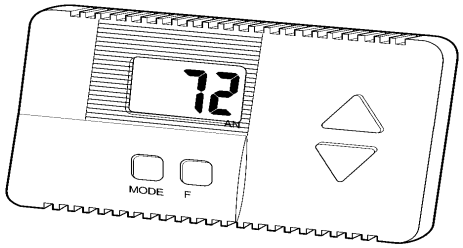

P1537

- Slim, low-profile design
- Fahrenheit/Celsius display
- Electronic anticipator adjustment
- 5 minute compressor protection
- All-electronic easy-to-read display
- Auxiliary heat indicator
- Configurable reversing valve “B” or “O” terminal
- Calibration capability

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
TSTATBBBAC01-B	1H, 1C	Heat/Cool	2-3/4″ x 4-1/4″ x 13/16″
TSTATBBBHP01	2H, 1C	Heat Pump	

RESIDENTIAL STANDARD BRYANT THERMOSTATS

24 VOLT, NON-PROGRAMMABLE

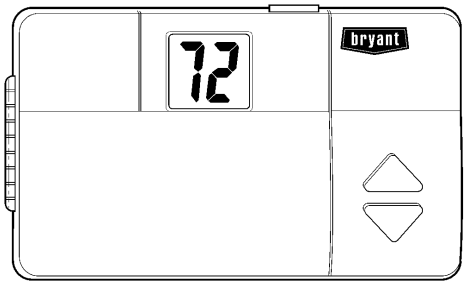

P1538

- Separate setpoints for heat/cool
- Autochangover
- Large numbers on backlit display
- Fahrenheit/Celsius display
- Adjustable clean filter timer
- 5 minute built-in compressor protection
- Calibration capability
- Ability to disable Autochangover
- Auxiliary heat lockout
- Auxiliary heat indicator (TSTATBBNHP01-B, TSTATBBN2S01-B)
- Outdoor sensor capability (TSTATBBNHP01-B, TSTATBBN2S01-B)
- Sensor capable (TSTATBBNHP01-B, TSTATBBN2S01-B)
- Battery-less operation
- Energize reversing valve “B” or “O” terminal

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
TSTATBBNAC01-B*	1H, 1C	Heat/Cool	3-7/8″ x 5-3/4″ x 1-7/16″
TSTATBBNHP01-B*	2H, 1C	Heat Pump	
TSTATBBN2S01-B*	3H, 2C	Multi-stage	

*Requires a common wire.

BRYANT WALL THERMOSTATS

RESIDENTIAL PROGRAMMABLE BRYANT THERMOSTATS

24 VOLT

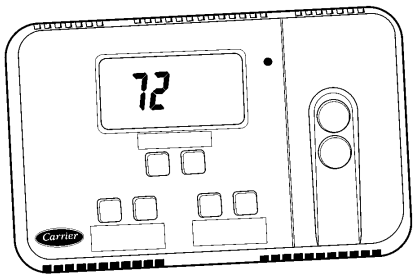

P1539

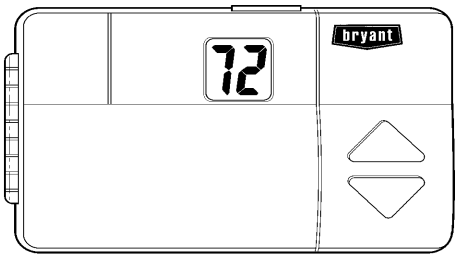

P1541

Thermostat Provides:

- 4 independent settings per day
- Self prompting programming
- Separate setpoints for heat/cool
- Program is NeverLost™
- Battery-less operation
- 5 minute built-in compressor protection
- Offset (calibration) capability

7 Day Adds:

- Auxiliary heat indicator (TSTATBBPHP01-B, TSTATBBP2S01-B)
- Autochangover
- Outdoor temperature sensor capability
- Auxiliary heat lockout
- Backlighting
- Clock is retained for 72 hours during power failure
- Ability to disable Autochangover

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
TSTATBBSAC01	1H, 1C	5-2 Day	Heat/Cool	3 1/2″ x 5 1/2″ x 3/4″
TSTATBBSHP01	2H, 1C		Heat Pump	
TSTATBBPAC01-B*	1H, 1C	7-day	Heat/Cool	4-1/4″ x 7-1/2″ x 1-7/16″
TSTATBBPHP01-B*	2H, 1C		Heat Pump	
TSTATBBP2S01-B*	3H, 2C		Multi-stage	

*These thermostats require a common wire.

RESIDENTIAL PROGRAMMABLE BRYANT THERMOSTATS

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
TSTATBBPDF01-B*	3H, 2C	7- Day	Dual Fuel	4-1/4″ x 7-1/2″ x 1-7/16″
TSTATBBPRH01-B*	2H, 2C		Thermidistat	

*Requires a common wire.

COMMERCIAL PROGRAMMABLE BRYANT THERMOSTATS

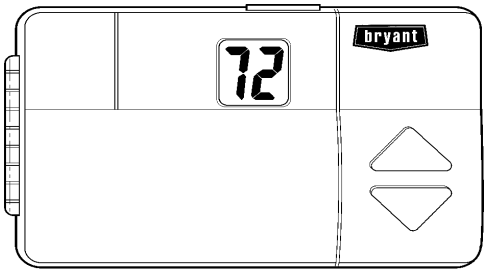

P1541

P/N	STAGES	FUNCTION	PROGRAMM-ING	DIMENSIONS H x W x D
TSTATBBPCM01-B	3H, 2C	Multi-stage	7-day	4-1/4″ x 7-1/2″ x 1-7/16″

*Requires a common wire.

- 4 independent settings per day
- Commercial language
- Self prompting programming
- Keypad lockout
- Separate setpoints for heat/cool
- Autochangeover
- Clock is retained for 72 hours during power failure. Program is never lost.
- Fahrenheit/Celsius display
- Adjustable clean filter timer
- Battery-less operation
- 5 minute built-in compressor protection
- Outdoor sensor capable
- Remote sensor capable
- Auxiliary heat indicator
- Thermostat “offset” (calibration) capability
- Remote Sensor “Offset” (calibration) capability
- Emergency heat available as a dipswitch
- Optional continuous fan during unoccupied periods
- Hold button can hold indefinitely
- Override button - adjustable 1-6 hours

PAYNE WALL THERMOSTATS

RESIDENTIAL STANDARD PAYNE THERMOSTATS - “Builders Stat”

24 VOLT, NON-PROGRAMMABLE

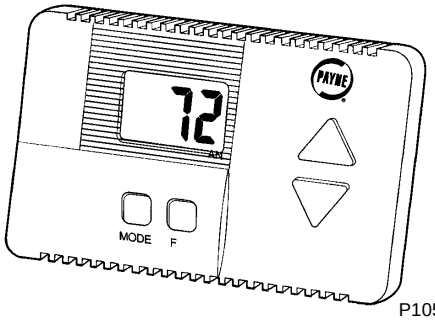

P1054

- Slim, low-profile design
- Fahrenheit/Celsius display
- Electronic anticipator adjustment
- 5 minute compressor protection
- All-electronic easy-to-read display
- Auxiliary heat indicator
- Configurable reversing valve “B” or “O” terminal
- Calibration capability

P/N	STAGES	FUNCTION	DIMENSIONS H x W x D
TSTATPPBAC01-B	1H, 1C	Heat/Cool	2-3/4″ x 4-1/4″ x 13/16″
TSTATPPBHP01	2H, 1C	Heat Pump	

RESIDENTIAL PROGRAMMABLE PAYNE THERMOSTATS

24 VOLT

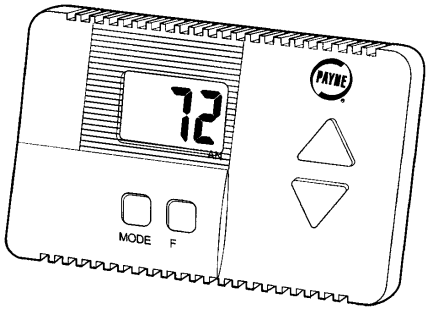

P1054

- 4 in dependent settings per day
- Self prompting programming
- Separate setpoints for heat/cool
- Program is NeverLost™
- Battery-less operation
- 5 minute built-in compressor protection
- Offset (calibration) capability

P/N	STAGES	PROGRAMM-ING	FUNCTION	DIMENSIONS H x W x D
TSTATPPSAC01	1H, 1C	5-2 Day	Heat/Cool	3-1/2″ x 5-1/2″ x 3/4″
TSTATPPSHP01	2H, 1C		Heat Pump	